

## MANUFACTURER

### Fa. Michael Hoffmann - Ice Resurfacing Equipment

Ackerstr. 149 ● 46483 Wesel ● Germany

Ph: +49(0) 173 - 52 79 481 ● m-hoffmann@conti-edger.com

[www.blade-changer.com](http://www.blade-changer.com)

## EXCLUSIVE WORLDWIDE DISTRIBUTION

### Zamboni USA

Frank J. Zamboni & Co., Inc.  
15714 Colorado Avenue  
Paramount, California  
90723-4211  
USA

Ph: (562) 633 - 0751

Fax: (562) 633 - 9365

### Zamboni Canada

Zamboni Company Ltd.  
38 Morton Ave. East  
Box 1388  
N3T 5T6 Brantford, Ontario  
Canada

Ph: (519) 758 - 5000

Fax: (519) 758 - 0500

### Zamboni Europe

Eigentalstr. 1, Box 123, CH - 8309 Nuersendorf

Ph: +41 44 837 01 91 / Fax: + 41 44 837 01 80

### Zamboni Distributors

[www.zamboni.com/contact/zamboni-distributors/](http://www.zamboni.com/contact/zamboni-distributors/)



(P) 973-584-0071

(F) 973-584-6948


[www.jandcice.com](http://www.jandcice.com)

**ZAMBONI**  
AUTHORIZED DEALER



# Conti- ICE RESURFACER

## Blade-Changing Assistant

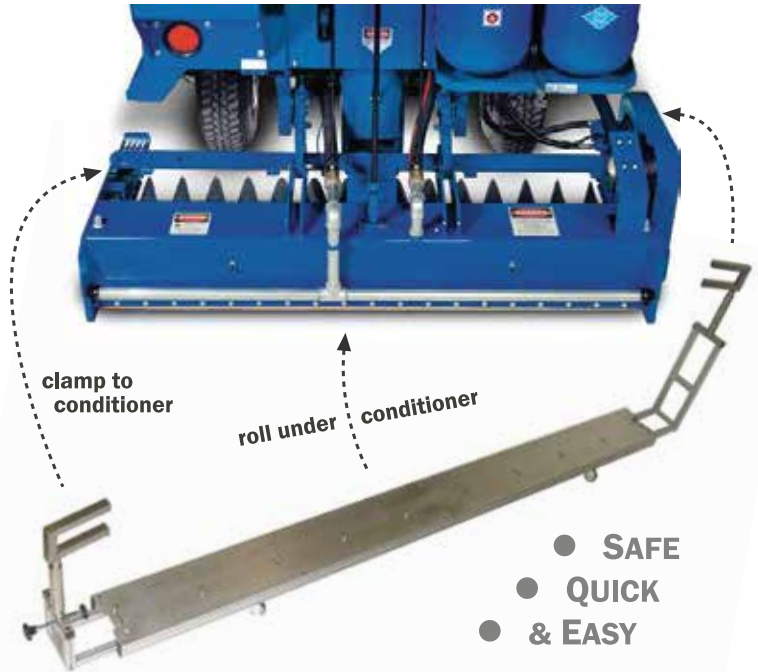

- SAFE
- QUICK
- & EASY

For the safest blade-changing procedure possible.



# Conti- ICE RESURFACER

SYSTEM

## Blade-Changing Assistant

The new **Conti Blade-Changing Assistant (CBCA)** enables the operator to complete a safe, quick & easy blade-changing procedure.

Using its **magnetic handles**, the Conti Blade-Changing Assistant installs a sharpened blade directly from its sheath without the operator having to touch the blade itself.

The device is rolled under the machine, then raised and secured to the conditioner using the **telescoping handles**.

The unique spring-loaded **hex pin system** holds the screws so the operator can loosen/tighten the nuts from above.

The operator no longer has to touch an exposed blade, nor kneel on the floor to reach the screws under the machine's conditioner.

**For the safest blade-changing procedure possible.**




### Adjustment Button & Bolt

Use the adjustment button & bolt to properly position the blade changer under the resurfacer's conditioner to further simplify the installation.



### Hex Pin System

The spring-loaded hex pins are arranged directly under the screws and hold them when tightening and loosening the nuts.



### Magnetic Blade Handles

Exposure to the sharp blade is eliminated by using the magnetic handles to install the blade directly from its sheath with the Conti Blade-Changing Assistant.



### Telescoping Handles

Simply raise the blade changer using the telescoping handles and clamp the blade to the conditioner.

